



HF/50MHz TRANSCEIVER

IC-7200



Simple & Tough with IF DSP



* The above photo includes optional MB-116 handles.

Simple & Tough with IF DSP




HF/50MHz TRANSCEIVER | **IC-7200**

| IF DSP

The latest IF DSP technology is employed in the IC-7200. While the IC-7200 is an entry-class transceiver, advanced digital features are comparable to higher class transceivers.

| AGC loop management

Distortion and blocking from strong nearby signals are prevented by placing DSP functions inside the AGC loop. The AGC time constants are selectable from fast, slow and off for each operating mode.

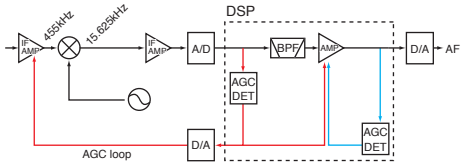

| Digital IF filter

Optional filters will be never required for the IC-7200. The built-in digital filter allows you to flexibly select the filter width and shape from soft and sharp* and provides cutting-edge filter characteristics.

* Filter shape is selectable for SSB and CW modes only.

Mode	Passband width range
SSB	50–500Hz; 50Hz step 600Hz–3.6kHz; 100Hz step
CW	50–500Hz; 50Hz step 600Hz–3.6kHz; 100Hz step
RTTY	50–500Hz; 50Hz step 600Hz–2.7kHz; 100Hz step
AM	200Hz–8kHz; 200Hz step

| Digital Twin PBT

Only Icom brings you Twin Passband tuning! Tailor your IF passband with the Twin PBT by electronically shifting the upper and lower edges of the IF filter. Depending on the use of the concentric knobs, you can either narrow the IF passband, or shift the entire passband to eliminate interfering signals.

| Manual notch filter

The manual notch filter delivers more than 70dB of attenuation. Strong interfering tones will be eliminated without adversely affecting the AGC loop performance. On the bottom right of the front panel, a dedicated control knob adjusts the notch filter frequency.

| Digital noise reduction

The digital noise reduction reduces background noise and improves the signal-to-noise ratio. The noise reduction level is adjustable in 16 steps. It improves the readability of voice and data signals.

| Digital noise blanker

The noise blanker reduces pulse-type noise such as engine ignition and sparking. The NB level and width (blanking duration) are adjustable in 100 steps.

| High stability transmitter

The DDS (Direct Digital Synthesizer) creates a clear, clean transmit signal and improves the C/N ratio. With a dual-fan cooling system, the IC-7200 provides stable high quality output even during high duty cycle operation.



| USB port for PC control

The IC-7200 can be controlled by a PC through a USB port using the CI-V data format. In addition, modulator and received audio can also be transferred over the USB cable. By using appropriate external software, you can record incoming calls and/or transmit preprogrammed messages from your PC.

| RF speech compressor

The digital RF speech compressor increases your average talk power in SSB mode. Even when the compression level is increased, the DSP controlled RF speech compressor provides low distortion audio.

| CW mode operation

Full break-in, selectable CW carrier point (USB or LSB) and adjustable CW pitch are also standard.

| Tough construction against water intrusion

Waterproof protection technologies that are used in Icom’s marine radios are applied to

the buttons and knobs on the front panel to provide a measure of protection against water intrusion.

* IC-7200 is NOT waterproof.



| Rugged design for outdoor use

The rugged design of the IC-7200 means your enjoyment of this rig is not limited to your shack only.

“Rear bumper”

The “rear bumper” protects various connectors on the rear panel and lets you stand the radio on its rear end when the antenna is disconnected, such as while moving or packing the radio.



| Other features

- RIT • VOX
- ±0.5ppm frequency stability
- LCD backlight (Hi/Lo/Off)
- CI-V interface
- 201 memory channels
- Built-in 20dB attenuator
- Preamplifier • Dial lock
- Auto TS function • 1Hz step tuning
- Band stacking register
- Built-in voice synthesizer • Quick split
- Front facing speaker • Quick set mode

SPECIFICATIONS

GENERAL

- Frequency range^{*1} :

Rx	0.030–60.000000MHz ^{*2}	
Tx	1.800–1.999999MHz	3.500–3.999999MHz
	5.255–5.405MHz ^{*3}	7.000–7.300MHz
	10.100–10.150MHz	14.000–14.350MHz
	18.068–18.168MHz	21.000–21.450MHz
	24.890–24.990MHz	28.000–29.700MHz
	50.000–54.000MHz	
- ^{*1} Shows USA version. Frequency coverage depends on version.
- ^{*2} Guaranteed range: 0.5–29.7 and 50–54.000 MHz.
- ^{*3} Some frequency ranges are not guaranteed.
- Mode : USB, LSB, CW, RTTY (FSK), AM
- No. of memory Ch. : 201Ch. (199 regular, 2 scan edges)
- Frequency resolution : 1 Hz
- Frequency stability : Less than ± 0.5 ppm
- Power supply requirement : 13.8V DC $\pm 15\%$ (negative ground)
- Current drain :

Transmit	Max. power	22.0A
Receive	Max. audio	2.0A
	Stand-by	1.3A
- Operating temp. range : -10°C to $+60^{\circ}\text{C}$; $+14^{\circ}\text{F}$ to $+140^{\circ}\text{F}$
- Antenna connector : SO-239 (50 Ω)
- Dimensions : 241x84x281 mm
(projections not included) 9.49x3.31x11.06 in
- Weight (approx.) : 5.5 kg; 12.1 lb

TRANSMITTER

- Modulation system :

SSB	Digital PSN modulation
AM	Digital low power modulation
- Output power :

SSB, CW, RTTY	2–100 W
AM	1–25 W* (* Carrier power)
- Spurious emissions (Unwanted emission) :

HF bands	Less than -50dB
50MHz band	Less than -63dB
- Carrier suppression : More than 50dB
- Unwanted sideband : More than 50dB
- Microphone connector : 8-pin connector (600 Ω)

RECEIVER

- Receive system : Triple-conversion superheterodyne
- Intermediate frequencies : 64.455MHz, 455kHz, 15.625kHz
- Sensitivity (10dB S/N, Preamp ON, Filter shape sharp) :

SSB, CW	Less than 0.16 μV (1.8–29.7MHz)
	Less than 0.13 μV (50MHz band)
AM	Less than 13 μV (0.5–1.799MHz)
	Less than 2 μV (1.8–29.7MHz)
	Less than 1 μV (50MHz band)

- Squelch sensitivity (SSB, threshold, Preamp ON) : Less than 5.6 μV
- Selectivity :

SSB	More than 2.4kHz/–6dB
(BW: 2.4kHz, sharp)	Less than 3.6kHz/–60dB
CW	More than 500Hz/–6dB
(BW: 500Hz, sharp)	Less than 900Hz/–60dB
RTTY (BW: 350Hz)	More than 360Hz/–6dB
	Less than 650Hz/–60dB
AM (BW: 6kHz)	More than 6.0kHz/–6dB
	Less than 15.0kHz/–60dB
- Spurious and image rejection ratio : More than 70dB
(Except $1/2$ IF through on 50MHz band)
- Audio output power : More than 2.0W at 10% distortion
(at 13.8 V DC) with an 8 Ω load
- RIT variable range : $\pm 9.999\text{kHz}$
- EXT speaker connector : 2-conductor 3.5 (d) mm ($1/8"$) /8 Ω

Supplied accessories:

- Hand microphone
- DC power cable
- Spare fuses

All stated specifications are subject to change without notice or obligations.

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.



Covers all HF and 50 MHz bands, provides clean, stable 1 kW output. Automatic antenna tuner and compact detachable controller are standard. 2 exciter inputs are available. (An optional OPC-599 is required.)




AH-2b ANTENNA ELEMENT
For mobile operation with the AH-4. All bands between 7–54MHz can be matched.



AH-4 HF+50 MHz AUTOMATIC ANTENNA TUNER
Covers 3.5–54MHz with a 7m (23ft) or longer wire antenna.



AT-180 AUTOMATIC ANTENNA TUNER
Covers 1.8–54MHz amateur band (Except for 5MHz band).



AH-710 FOLDED DIPOLE ANTENNA
Covers from 1.9 to 30MHz. Has a PL-259 connector. Easy to assemble (non-kink construction).



PS-126 DC POWER SUPPLY
13.8V DC, 25A max. with 4-pin type connector.



SP-21 EXTERNAL SPEAKER
Input impedance: 8 Ω
Max. input power: 5W



SP-10 EXTERNAL SPEAKER
Compact size speaker.



SM-50 DESKTOP MICROPHONE
Dynamic desktop microphone. Includes [UP]/[DOWN] switches and a low cut function.



SM-30 DESKTOP MICROPHONE
Compact, lightweight electret desktop microphone.
SM-20 is also available.



SM-27 DESKTOP MICROPHONE
Dynamic microphone equipped with PTT lock switch.



CT-17 CI-V LEVEL CONVERTER
For remote transceiver control from a PC equipped with an RS-232C port.



RS-BA1 IP REMOTE CONTROL SOFTWARE
For IP remote transceiver control from a PC.



MB-116 HANDLES
Protect buttons and knobs on the front panel when moving the radio.



MB-118 MOBILE MOUNTING BRACKET
For mounting the radio in a vehicle.



OPC-599 CABLE ADAPTER
Converts 13-pin ACC connector to 7-pin + 6-pin ACC connector for connection with IC-PW1/EURO.



HM-36 HAND MICROPHONE
Same as supplied.

MB-117 CARRYING HANDLE
Convenient when carrying the transceiver.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com